


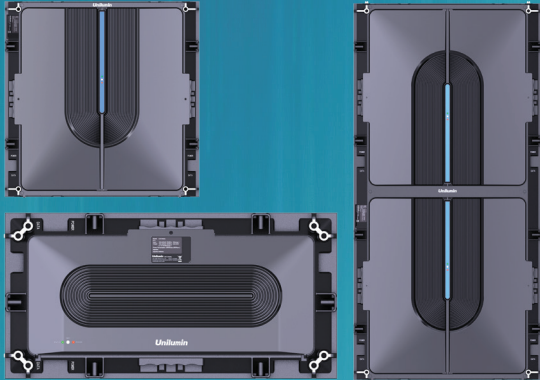

USlimII 2.5

INDOOR SOLUTION

- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance.

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance



USlimII modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.



After opening the back cover, USlimII's modules, receiving cards and cables can be maintained from the rear.

Contact Us

844.263.3675 | www.unilumin-usa.com

Find Us @UniluminUSA



Parameter	Value	
Pixel Pitch	2.5mm	
LED Type	3-in-1 SMD	
Brightness	1000 cd/m ² (nits)	
Pixels Per Panel 4 sizes:	200 x 100px 300 x 100px	200 x 200px 200 x 400px
Pixel Density	409,600 pixels/m ²	
Weight Per Panel 4 sizes:	3.2kg (7.1 lbs) 8.8kg (19.4 lbs)	5.6kg (12.3 lbs) 10.5kg (23.1 lbs)
Module Size	W250mm x 250mm (9.8in x 9.8in)	
Panel Size (mm) 4 sizes:	500 × 250 x 39.6 750 × 250 x 39.6	500 × 500 x 39.6 500 x 1000 x 39.6
Curve	0~+5° (Optional, standard is 0°)	
Material	Die-cast Aluminum	
Ingress Protection	IP50/IP10	
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH	
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH	
Maintenance	Front & Rear	
Horizontal / Vertical Viewing Angle	155° / 155°	
Color Temperature	2000-9300K Adjustable	
Brightness Control	Manual/Automatic	
Contrast Ratio	5000:1	
Input Power (Max/Typical)	480±10%W/m ² / 160±10%W/m ²	
Processing Depth	14bit	
Video Frame Rate	50/60 Hz	
Refresh Rate	3840 Hz	
Input Voltage	100~240VAC	
Input Power Frequency	50~60 Hz	
Mounting Configurations	Fixed, Floor-mounted, Hanging	
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape	

Specifications are for reference only and are subject to change without notice.