



## URMIII 03 (Pro)

500mm×1000mm  
OUTDOOR RENTAL SOLUTION

- Click-lock — true single-person installation
- Flip-shield — comprehensive corner protection
- Pinch n' Go Module — easy maintenance
- Features black surface

### Ease of Use Features



HDR  
Technology



Interchangeable  
Power Supply



Bottom  
Protection



Modular  
Design



Click-lock



Flip-shield  
for corner protection



Pinch n' Go Module


### Creative Installations



Curved Install




°90 Corner Install

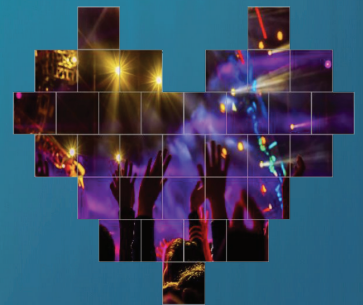

Creative Install

# Hanging & Stacking Installation

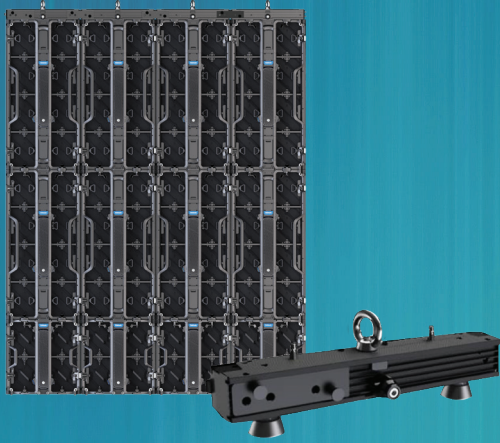

2-in-1 Hanging & Ground Beam



Stacking Installation Accessories  
(ground beam & support, back frame & connector)

| Parameter                           | Value  |
|-------------------------------------|--|
| Pixel Pitch                         | 3.9mm  |
| LED Type                            | 3-in-1 Black SMD                                   |
| Brightness                          | 3000 cd/m <sup>2</sup> (nits)                      |
| Pixels Per Panel                    | 128 x 256 pixels                                   |
| Pixel Density                       | 65,536 pixels/m <sup>2</sup>                       |
| Weight                              | 13.9 kg (30.6 lbs)                                 |
| Module Size                         | W250mm × H250mm (9.8in x 9.8in)                    |
| Cabinet Size                        | W500mm × H1000mm × D83mm (19.7in x 39.4in x 3.3in) |
| Aspect Ratio                        | 1:2  |
| Material                            | Die-casting Aluminum                               |
| Ingress Protection                  | IP65   |
| Operating Temperature/Humidity      | -20°~ +50° / 10~90%RH                              |
| Storage Temperature/Humidity        | -20°~ 55° / 10~90%RH                               |
| Curvability                         | (Convex) -10°~+10°(Concave)                        |
| Horizontal / Vertical Viewing Angle | 140° / 120°  |
| Color Temperature                   | 2000-9300K Adjustable                              |
| Brightness Control                  | Manual/Automatic                                   |
| Contrast Ratio                      | 5000:1   |
| Input Power (Max/Typical)           | 335W / 100W per panel                              |
| Video Frame Rate                    | 50/60 Hz   |
| Processing Depth                    | 14 bit   |
| Refresh Rate                        | 3840 Hz  |
| Input Voltage                       | 100~240VAC   |
| Input Power Frequency               | 50~60 Hz   |
| Mounting Configurations             | Hanging, Stacking                                  |
| Certifications                      | TUV-CE/CB/FCC/IC/UL                                |

Specifications are for reference only and are subject to change without notice.